

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


(51) International Patent Classification ⁷ : H04Q 7/22		A1	(11) International Publication Number: WO 00/44185
			(43) International Publication Date: 27 July 2000 (27.07.00)
(21) International Application Number: PCT/IB00/00054			(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 19 January 2000 (19.01.00)			
(30) Priority Data: 09/235,606 20 January 1999 (20.01.99) US			
(71) Applicant: LOJACK CORPORATION [US/US]; 333 Elm Street, Dedham, MA 02026 (US).			
(72) Inventors: DUVALL, William; 67 Bowditch Road, Sudbury, MA 01776 (US). DEMILLE, Rod; 179 Concord Road, Sudbury, MA 01776 (US).			
(74) Agent: RINES, Robert, H.; MacLeod Allsop, Bledington Grounds, Bledington, Gloucestershire OX7 6XL (GB).			

Published

With international search report.

Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: METHOD AND SYSTEM FOR LOCATION DATA COMMUNICATION USING A CELLULAR PHONE NETWORK

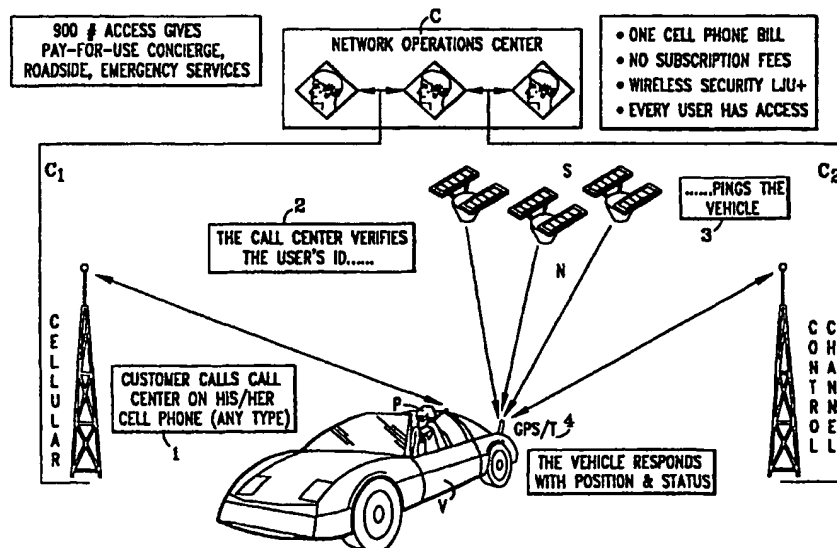

(57) Abstract

A novel method of and system for enabling the use of one portable cellular phone only, in voice communication with a cellular network control center for voice-requesting position or location data services, and, with the aid of a vehicle GPS-transponder activated in response to signaling from the control center over cellular network channel control paths, to receive and process at the vehicle GPS location data from satellites, and to transmit the data over the said channel control paths to the control center, for then sending therefrom to the user of the portable cellular phone.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1.

METHOD AND SYSTEM FOR LOCATION DATA COMMUNICATION USING A CELLULAR PHONE NETWORK

The present invention relates to cellular telephone voice communication and positional location data communication; being more particularly, though not exclusively, concerned with vehicle communication equipment using cellular phones and provided with a GPS input, wherein the driver can call a central service center to receive directions or safety or security services, navigational aid and other services.

BACKGROUND

In the recent past, vehicular equipment has been provided to enable the reception by the driver of positional location services through a combined voice and data cellular phone equipped with a GPS receiver input, enabling the driver to call a central service center over a personal cellular phone to provide directions, safety services or security services to the driver of the vehicle. Among such products are "Onster" by General Motors, the Ford "Rescu", and Media Management's "Caring", among others. The current industry requires the owner of the car to pay a hardware fee for a vehicular telephone-GPS equipment, an activation fee for this second phone, a recurring monthly fee (which varies from \$20.-\$25.00), and, additionally, a fee for usage, such as paying for the call by the minute or the service. These numerous required fees have disadvantageously mitigated against the anticipated, but not as yet currently attained, commercial success hoped for in these products. The after-market also has been offering a combined voice and data cellular phone with a GPS module to accomplish these services in the same manner.

In accordance with the novel concepts of the present invention, on the other hand, through a novel separation of voice and data aspects of the equipment and services, the inhibiting charges and costs underlying present-day offerings are eliminated, and a break-through, promising much wider acceptance of this technology, now appears in the offing.

OBJECTS OF INVENTION

An object of the present invention, accordingly, is to provide a new and improved method of and system for portable cellular phone voice communication and positional location data communications, that shall not be subject to the prior art disadvantages above discussed, but that, to the contrary, through a novel separation of voice and data aspects of the equipment and services, promises improved performance with substantially lower costs.

Other and further objects will be explained hereinafter and are more particularly delineated in the appended claims.

SUMMARY

In summary, from one of its broader aspects, the invention embraces a method of voice and positional location data radio communication over a cellular phone network having cellular radio voice and control channel paths separately communicating with a network operations control center, that comprises, user voice-calling the control center from a portable cellular telephone location over the cellular voice path, requesting location information services; upon user verification, sending a radio signal from the control center over the control channel path to be received at said location; providing a

radio transponder and GPS receiver and microprocessor module at said location;
activating the GPS receiver in response to receipt of said signal, to receive and process location data from the GPS satellite constellation and to activate the transponder to transmit processed location data over the control channel path to said control center; associating the transmitted location data with the user voice call request at the control center; and sending location service information from the control center to the user.

Preferred and best mode designs and operation are later described.

DRAWINGS

The invention will now be explained in connection with the accompanying drawings, Figure 1 of which is a schematic diagram of the techniques and system of the invention adapted for vehicular use and in preferred form; and

Figure 2 is a similar diagram including pedestrian or personal portability.

PREFERRED EMBODIMENT(S) OF INVENTION

As earlier mentioned, a major difference between what is currently used in the industry and the concept underlying the present invention involves the separation of the data and the voice aspects of the service. The user still makes voice calls over the radio voice path to the call center, with the user's own existing portable cellular phone. A separate vehicle module is provided which uses a vehicle - provided data transmitter-receiver portion of the vehicle module (not a full voice and data phone as presently required), transmitting the GPS and other data back along the control channel path of the cellular voice phone network. This is as contrasted with the present whole vehicle cellular telephone voice and data phone (and its further costs before discussed), built in as

a requirement for the proper operation of the system. The invention, rather, relies on the user's portable phone for voice, and not the dedicated in-car vehicle phone control channel radio, which is confined or restricted to data transmission only, and along the cellular phone network control channel only. This means there is no longer the need for the customer to have a second phone bill, additional to the user's portable phone, in light of the use of the no-charge (or minimal fee) cellular network control channel path for positional data only.

In cellular phone network coverage areas, each AMPS (advance mobile phone standard) cell site generically has one to three control channels that serve to alert the network of a user's presence so that the user may be located. The control channels set up calls, break down calls and switch cell sites. Although these control channels are necessary to enable voice operation, they remain otherwise unused for most of the time. While it has before been proposed in Aeries "MicroBurst" technology and in Bell South's "Cellemetry" to provide low data rate communication over such cellular control channels, the present invention uses the same for a different purpose and in a very different system operation.

The invention only requires the paying of the recurring monthly fee for the user's existing portable phone, and there may be no further recurring fees for the vehicle module which, in accordance with the invention, communicates only over the control channel of the cellular network and only to transmit data.

Turning now, to the embodiment shown in Figure 1, the customer in the vehicle V is shown calling at 1 on any type of existing cellular phone P, presumably one that the driver already owns, to the network operations call center, so labeled at C. The center

receives the cellular phone call at the appropriate network antenna ("CELLULAR") over the normal voice cellular phone channel C1, and, in usual fashion, verifies that the caller's user ID is correct, often by requesting a PIN code at 2, as is well known. Then the call center C separately and independently, using the PIN code, looks up the appropriate control channel access number, and sends or "pings" a radio query at 3, along path C2 and the channel control transmitter antenna ("CHANNEL CONTROL"), to a control channel transponder-GPS receiver module, GPS-T, provided in the vehicle V. The receipt of the radio signal "ping" 3 by the vehicle module, wakes up or activates the GPS receiver ("GPS") therein and calculates by its microprocessor, the vehicle position 25 determined by receiving the navigation signals N from the GPS satellite constellation S. The vehicle module transponder transmitter portion T is then activated to respond back at 4 to the CONTROL CHANNEL path and through the control channel C₂, with the vehicle position location data information and any other data information which may be selected for sending along the control path C₂, back to the network operations call center C. The center can now inform the caller where the vehicle is currently located, thereby enabling driver planning and executing of vehicle routes, and/or providing other services. By associating this information received along the control channel with the appropriate user voice call request received along the cellular phone channel C1, the control center C then communicates the requested positional or other service information back to the user in the vehicle V.

Turning to Figure 2, the same operations of the system of Figure 1 are shown provided, supplemented, however, by the facility for pedestrian or other personal use of the system by the user's portable cell phone P¹, equipped with its own GPS¹-T¹ module.

In addition to the novel idea of separating voice and data channels to accomplish cost economy, the invention also lends itself to the reduction of the hardware cost. The vehicle modules that are currently available from the before-mentioned companies offering "Onster" and "Rescu", and those in the after-market, are relatively large, power-hungry and very expensive. Under the operation of this invention, to the contrary, the need is eliminated for the current full blown voice and data typical vehicular cellular phone with its microphone, speaker, dialer, display and case, batteries and charger, and so forth. The only function of such vehicle cellular phone used in accordance with the data communication along the cellular network control channel with the present invention is just the 900 megahertz radio transmitter. The integration of just the control channel transponder - GPS-receiver and microprocessor technologies as the vehicle module, thus provides a significant improvement and substantial cost reduction. Even in the absence of such special chip integration or miniaturization, conventional modules can be readily assembled to practice the invention. A standard communications model CMM 8600 Microburst™, for example, is a typical cellular radio telephone unit, and manufacturers providing hardware components for the purpose of operating on the cellular phone network control channel include Standard Radio and Standard Communications of Japan (providing radio equipment for the Aries "MicroBurst" protocol). Erickson and Wireless Link also currently provide appropriate radio transceivers.

As an extended feature of the invention, and an additional use of the transponder T and the channel control facility C₂ otherwise used for the invention, even in the absence of the driver and/the portable cellular phone P, the vehicle may be made self-monitoring against being broken into or hot wired or towed or otherwise disturbed, through the

addition of vehicle-movement and related sensors, as disclosed in applicant's co-pending application Serial No. 873,851 originally filed April 12, 1995 for Improved Vehicle Tracking Transponder System and Transponding Method. The activation of such sensor(s), schematically illustrated as S¹ in Figure 1, may intelligently wake up the control channel transceiver T, which would then send back the GPS code and identification to the network operations center C, independently of the use of the voice cellular phone of Figure 1. The call center would detect this as an alarm condition and would call the owner of the vehicle. This is important because, with current-day vehicle telephones embedded with GPS receivers, if there is no one in the car to receive the verification phone call from the center, or even worse, if a thief is in the car to receive this phone call, it would not be possible correctly to determine the status of the alarm. With the present invention, however, the cellular phone is a portable phone which the customers have with them, or some other pre-designated phone, so that even if the customers are far removed from the vehicle, they would still receive the notification of an alarm from the center.

In the before-mentioned earlier co-pending application, the sensor on the vehicle, when activated, triggered the same vehicle transponder that was normally used in the type of vehicle recovery system currently marketed by the LoJack Corporation and described in U.S. Patents Nos. 4,818,998 and 4,908,629, to permit tracking by alerted police vehicles on pre-assigned frequencies. In such vehicle tracking, the transponder or transceiver in the stolen or missing vehicle enables the vehicle to be located and/or tracked by appropriately equipped police direction-finding tracking vehicle through homing-in on periodic transponder reply radio transmissions automatically activated by

command activation signals broadcast on the same carrier frequency as the transponder reply signals, and with encoded vehicle identification information that causes the intended vehicle transponder so to reply, as explained in these patents. The system also had provision for modifying the command signals to require an increased rate of periodic transponder reply signal transmission to assist homing-in on the selected vehicle. In a preferred mode of operation, the verification of whether the reportedly missing vehicle is thus transponder-equipped is preferably established by querying the FBI-NCIC computer system, which will provide the said coded vehicle identification information and automatically cause the appropriate sector or area to broadcast said command activation signals. The tracking vehicle, in accordance with a feature of the present invention, may also be alerted and/or supplied with the GPS location data as to a vehicle that is being unauthorizedly tampered with or moved and being tracked, further aiding in the recovery of the stolen vehicle. In one version, for example, a pre-designated phone, such as P in Figure 1, may be disposed in, or in communication with, the "LoJack" police or other tracking vehicle (V), for receiving this supplementary location information from the control center.

Further modifications will also occur to those skilled in this art, and such are considered to fall within the spirit and scope of the invention as defined in the appended claims.

What is claimed is:

1. A method of voice and positional location data radio communication over a cellular phone network having cellular radio voice and control channel paths separately communicating with a network operations control center, that comprises, user voice - calling the control center, from a portable cellular telephone location over the cellular voice path, requesting location information services; upon user verification, sending a radio signal from the control center over the control channel path to be received at said location; providing a radio transponder and GPS receiver and microprocessor module at said location; activating the GPS receiver, in response to receipt of said radio signal, to receive and process location data from the GPS satellite constellation for the vehicle and to activate the transponder to transmit the processed location data over the control channel path to said control center; associating the transmitted location data with the user voice call request at the control center; and sending location service information from the control center to the user.
2. The method of claim 1 wherein said user location is in a vehicle, and the said module is provided in the vehicle.
3. The method of claim 1 wherein said user is a pedestrian or is located at another personal user location at which the user is provided with a personal cellular phone and said module.

4. The method of claim 1 wherein said associating of location data received over the control channel path with the voice call received over the cellular voice path is effected by PIN information at the control center.

5. The method of claim 2 wherein the vehicle is further provided with movement/tampering alarm sensing; and, in response to such sensing, and apart from the presence or absence of the user at the vehicle, activating the vehicle GPS-transponder module to receive and process GPS location data for the vehicle and to transmit the data with vehicle user identification as an alarm over the control channel path to said control center; associating the transmitted location alarm received at the control center with a phone pre-designated by the vehicle by user; and calling the alarm from the control center to that phone.

6. A method of radio communication over a cellular phone network between a vehicle location and an operations control center of a cellular phone network having a control channel path, that comprises, sensing unauthorized movement/tampering at the vehicle; providing a GPS receiver-radio transponder module at said vehicle location; in response to such sensing, and apart from the presence or absence of a user at the vehicle, activating the GPS-receiver transponder module to receive and process GPS location data for the vehicle, and transmitting said data with vehicle user identification as an alarm over the network control channel path to said control center; associating the transmitted

location alarm data received at the control center with a phone pre-designated by the vehicle user; and calling the alarm from the control center to that phone.

7. A system for voice and positional location data radio communication over a cellular phone network having cellular radio voice and control channel paths separately communicating with a network operations control center, the system having, in combination, a portable cellular telephone for user voice-calling to the control center over the cellular voice path, for requesting user location information services; means operable upon user identification, for sending a radio signal from the control center over the control channel path to be received at the user location; a radio-transponder GPS receiver and microprocessor module disposed at said location; means for activating the GPS receiver of the module in response to receipt of said radio signal, to receive and process location data from the GPS satellite constellation for the vehicle and to activate the transponder to transmit the processed location data over the control channel path to said control center; and means for sending location services information from the control center to the user upon associating the transmitted location data with the user voice call request.

8. The system of claim 7 wherein said user location is in a vehicle, and the said module is provided in the vehicle.

9. The system of claim 7 wherein said user is a pedestrian or is located at another personal user location at which the user is provided with a personal cellular phone and said module.
10. The system of claim 7 wherein said associating of location data received over the control channel path with voice call received over the cellular voice path is effected by PIN information means at the control center.
11. The system of claim 8 wherein the vehicle is further provided with movement/tampering alarm sensing means; and means operable in response to such sensing, and apart from the presence or absence of the user at the vehicle, for activating the vehicle GPS-transponder module to receive and process GPS location data for the vehicle and to transmit the data with vehicle user identification as an alarm along the control channel path to said control center; and means for associating the transmitted location alarm received at the control center with a phone pre-designated by the vehicle user; and means for calling the alarm from the control center to that phone.
12. A system for radio-communication over a cellular phone network between a vehicle location and an operations control center of a cellular phone network having a control channel path, that comprises, means for sensing unauthorized movement/tampering at the vehicle; a GPS receiver-radio transponder module disposed at said vehicle location; means operable in response to such sensing, and apart from the presence or absence of a user at the vehicle, for activating the GPS – receiver transponder

module to receive and process GPS location data for the vehicle, and for transmitting said data with vehicle user identification as an alarm over the network control channel path to said control center; means for associating the transmitted location alarm data received at the control center with a phone pre-designated by the vehicle user; and means for calling the alarm from the control center to that phone.

13. The system as claimed in claim 12 wherein a phone so pre-designated at the control center is carried by or in communication with a further vehicle provided with means for tracking periodic radio reply transmissions from a further transponder provided in said further vehicle and automatically activated by command activation signals broadcast on the same carrier frequency as the reply transponder signals.

1/2

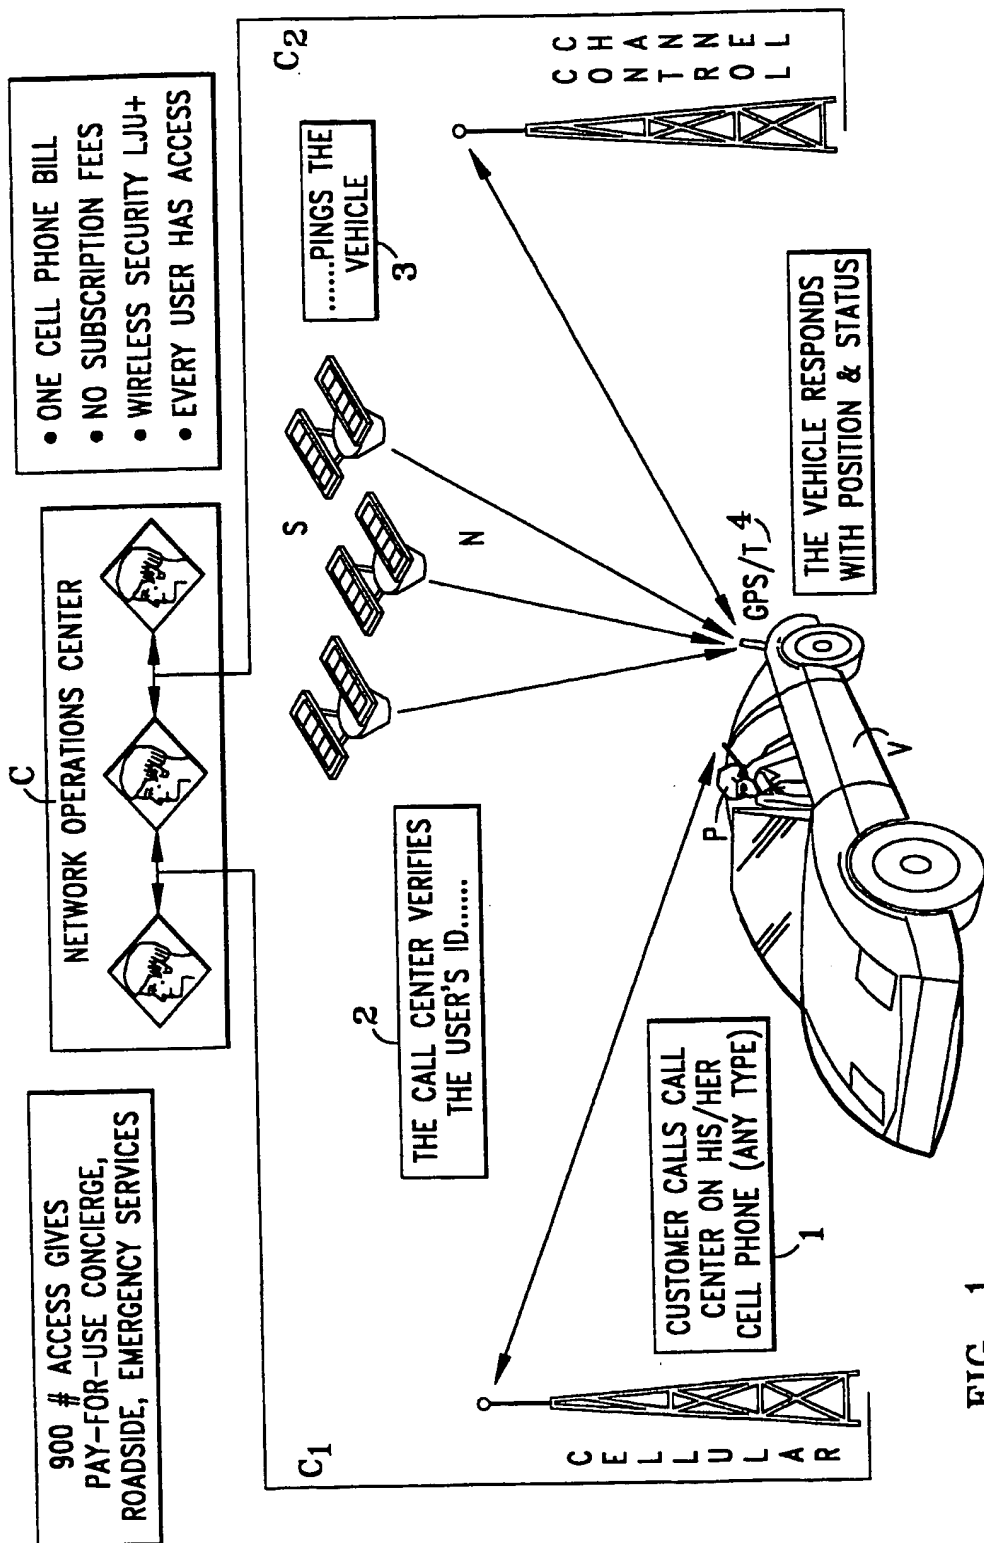


FIG. 1

2/2

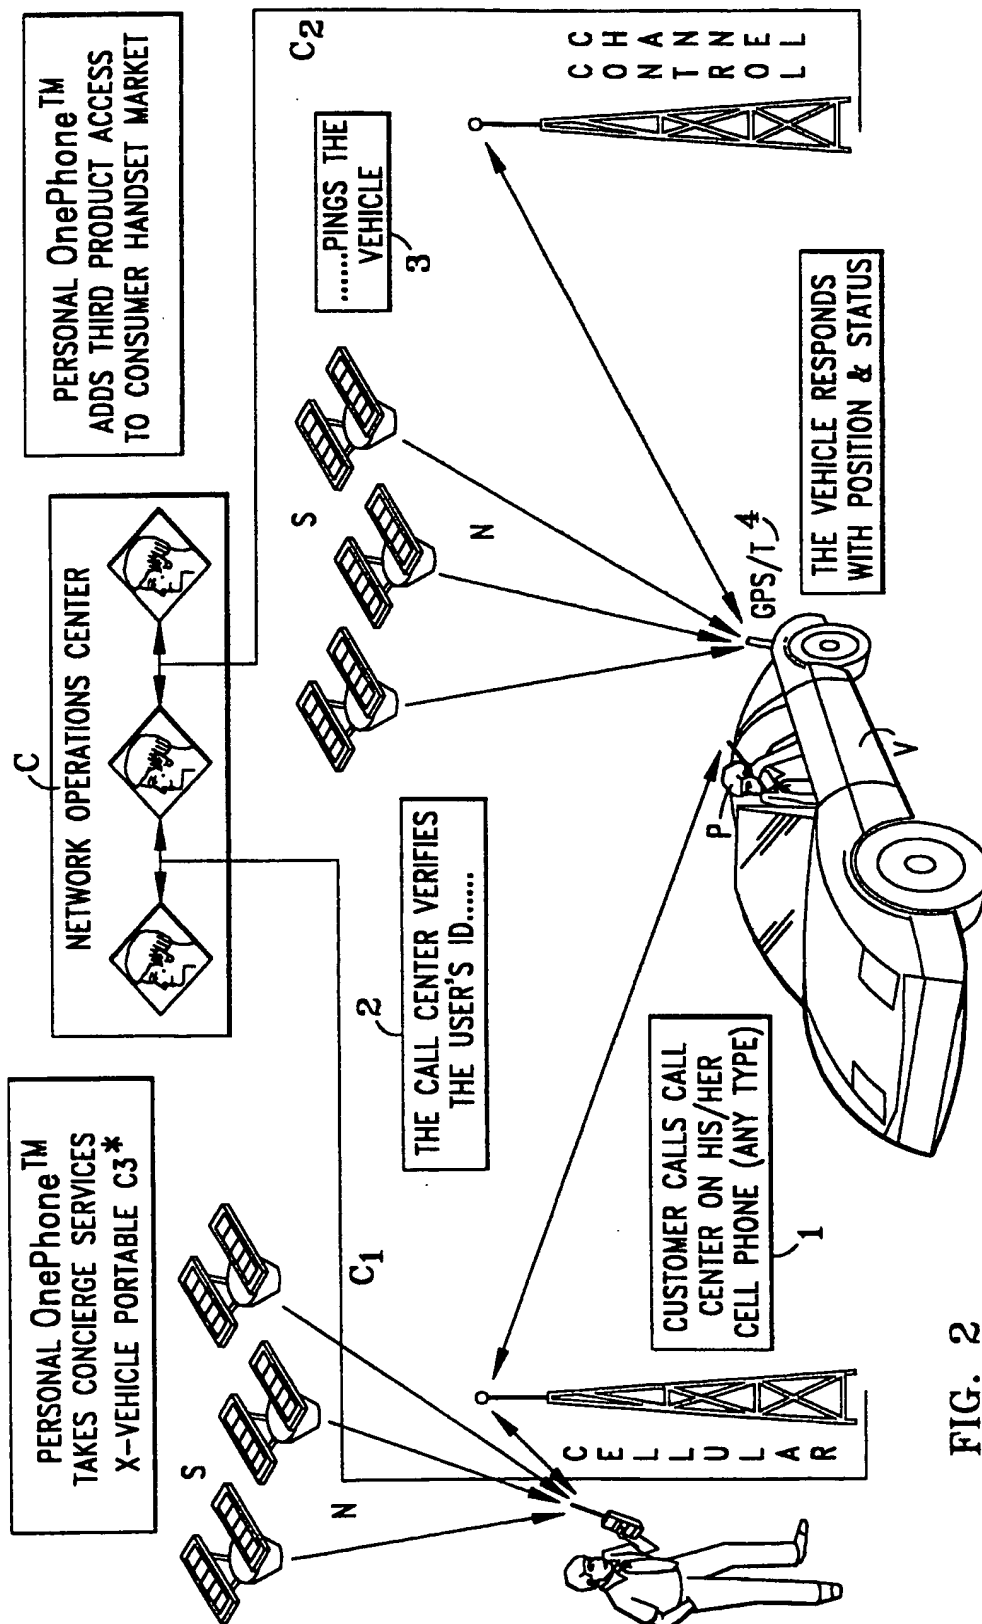


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IB 00/00054

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 H0407/22		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 B60R H04Q G08B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 98 00988 A (ERICSSON GE MOBILE INC) 8 January 1998 (1998-01-08) page 5, line 20 -page 6, line 21 page 9, line 12 -page 10, line 35 page 15, line 19 -page 17, line 19 page 18, line 32 -page 19, line 8 page 23, line 13 - line 17 claims 13,23 figures 1,3,5 ---	1,7 2-4,8-10
X A	WO 96 26614 A (GLOBAL LOCATING SYSTEMS INC) 29 August 1996 (1996-08-29) page 4, line 5 -page 9, line 22 page 14, line 23 -page 15, line 3 page 21, line 7 -page 22, line 4 page 23, line 32 -page 26, line 28 figures 1-3,7 -----	6,12 1,2,5,7, 8,11
<div style="display: flex; justify-content: space-between;"> <input type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
* Special categories of cited documents :		
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed		"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "S" document member of the same patent family
Date of the actual completion of the international search	Date of mailing of the international search report	
14 June 2000	21/06/2000	
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	Authorized officer Barel, C	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 00/00054

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9800988 A	08-01-1998	AU 3592797 A	21-01-1998
WO 9626614 A	29-08-1996	AU 4979096 A	11-09-1996